


Cable	RG316/U	Frequency	860~876MHz
OD	ø2.6±0.2mm	V.S.W.R	2.4:1
Cover	429C (Gray)	Impedance	50Ω
MCX M RA	Gold-plated	Gain	0~3dB

ROHS

ISO 9001

ISO 14001

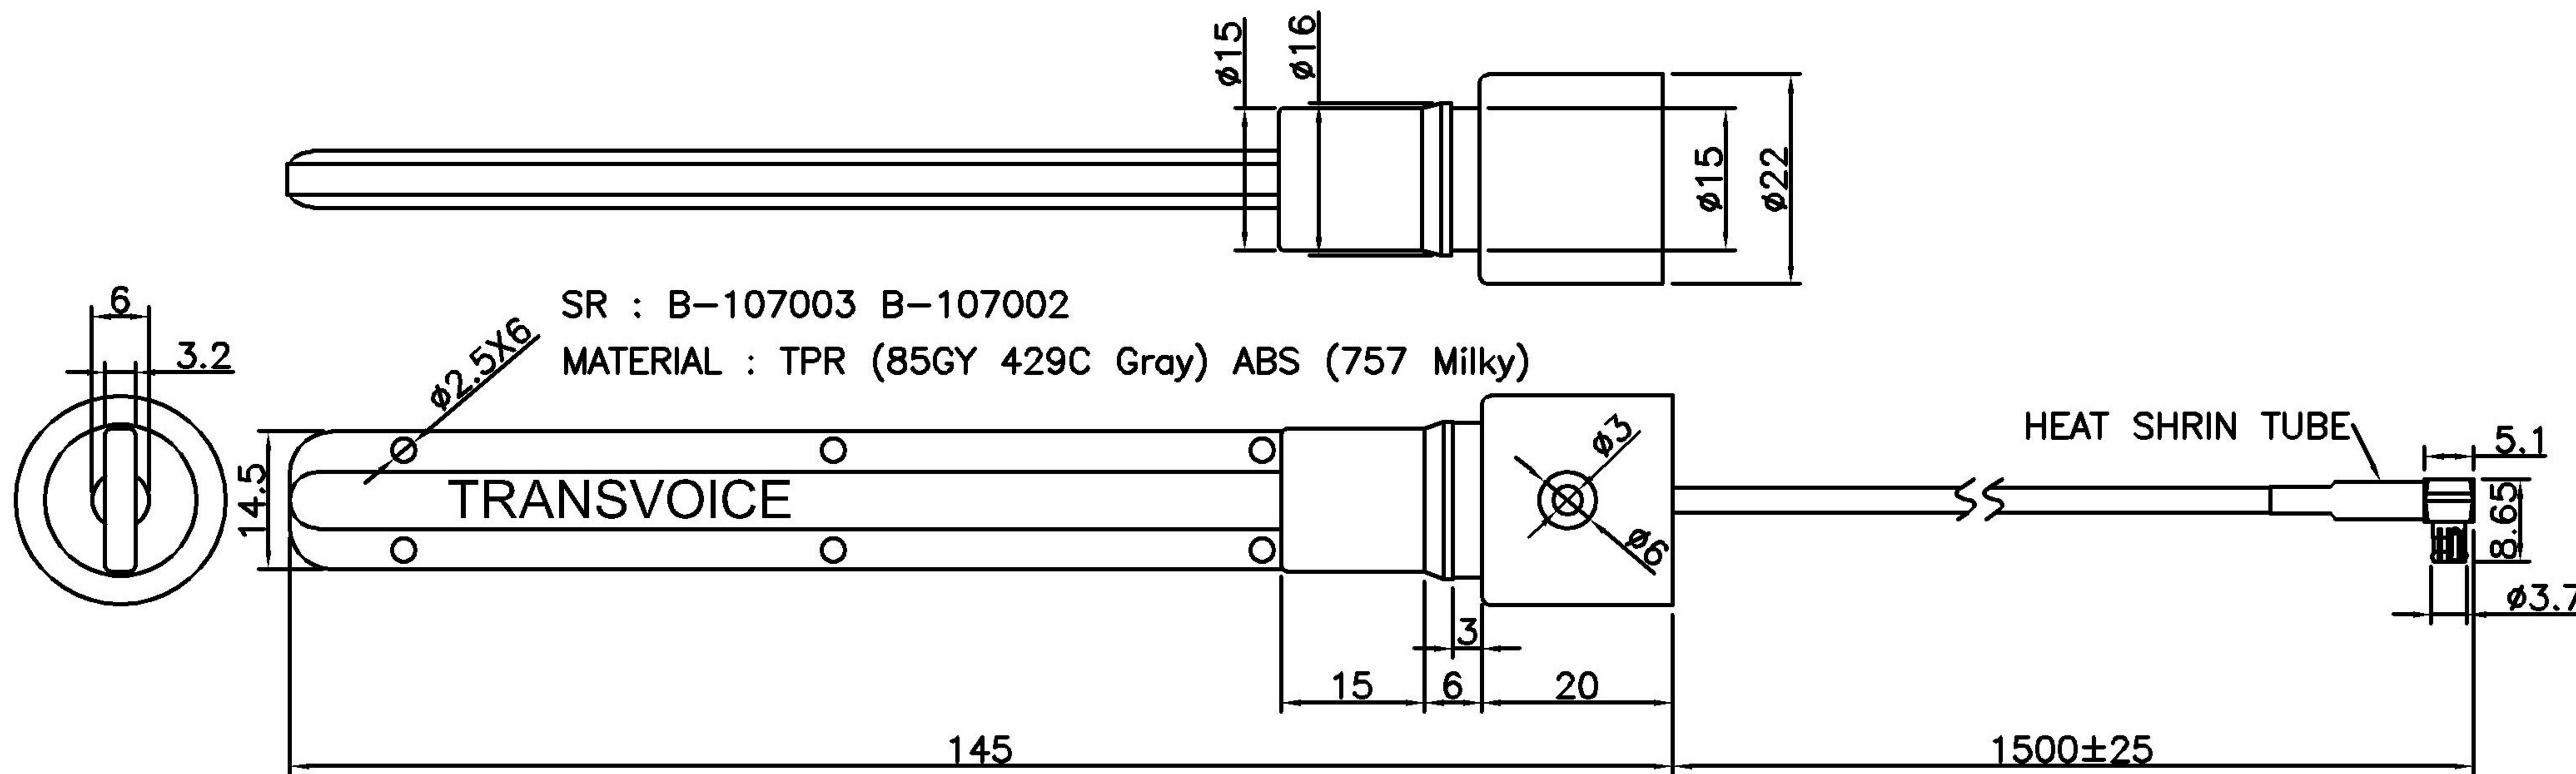

Material:		Treatment:		TRANSVOICE			
Drawer	Design	Aprov	Tolerance	Unit: mm		TITLE	Ant+316U+MCX M RA
			X=±0.5 .X=±0.2 .XX=±0.1 .XXX=±0.05	Ver: A	Scale 1:1	Model NO	
NO	DESCRIPTION	MATERIAL / FINISH	Q*TY			Drawing NO	
Part NO							