


FEATURES



- HD Multi-purpose Camera Control Box for various applications
- FHD/HD / 60fps / 50fps / 30fps / 25fps & CVBS Compatibility
- Various screen modes (FULL, SPLIT, TRIPLE, QUAD)
- Motorized Shutter camera support & camera heater support
- 4 Camera Inputs: 4-pin mini DIN (MXN configuration)
- 4 Camera Inputs: BNC
- 1 A/V input (RCA), 1 D-Sub input, 1 HDMI input
- 1 A/V output (RCA), 1 HDMI output
- 4 Trigger Inputs
- Multi-lingual On Screen Display (OSD):
English, Swedish, Danish, Norwegian, Dutch, Finnish
- Automatic Detection for HD-TVI cameras and CVBS cameras
- Auto Scan function
- Auto Power ON/OFF
- On Screen Menu Lock ON/OFF function
- Electronic Distance Marker (Parking line)
- Free Input voltage (DC 10V ~ 32V)
- Speed switch function (via analogue tacho signal)
- Easy Settings by Remote Control
- IR receiver with built-in status LED
- Image Cropping Function (Horizontal SPLIT2 & Vertical SPLIT 2)
- 12V DC OUT (to activate any monitor with Trigger Input, Max. 500mA)

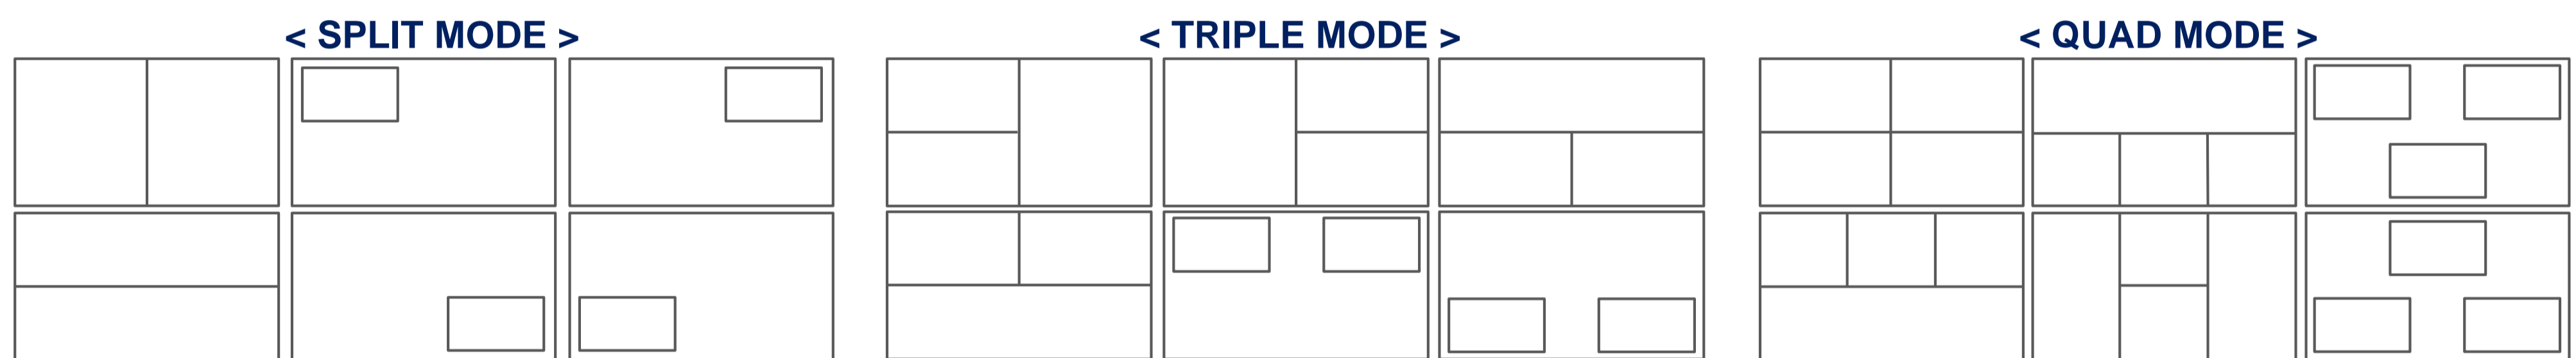

Specifications

Power Input	DC 10V ~ 32V
Power Consumption	Max. 30Watt
Video System	HD-TVI (25fps, 30fps, 50fps, 60fps), AHD (25fps, 30fps), CVBS-PAL, CVBS-NTSC
Camera Input (4-pin mini DIN)	4CH, Composite Video 1Vp-p 75Ω (MXN configuration)
Video Input (BNC)	4CH, Composite Video 1Vp-p 75Ω
A/V Input (HDMI)	1CH, Up to 2160p 50/60
A/V Input (RCA)	1CH, Composite Video 1Vp-p 75Ω 1CH, Audio, 150mV RMS 47K
Video Input (D-Sub)	1CH, VGA, R/G/B Video 0.7Vp-p, H/V Sync, I ² C
A/V Output (HDMI)	1CH, HDMI 1.3, 1080p 50/60
Video Output (BNC)	4CH, Loop out, Composite Video 1Vp-p 75Ω
A/V Output (RCA)	1CH, Composite Video 1Vp-p 75Ω 1CH, Audio, 150mV RMS 47K
Operating Temperature	-25°C ~ +75 °C
Storage Temperature	-30°C ~ +85 °C
Ambient Condition	Indoor use only
Vibration	5.5G
Dimensions	162 (W) X 43 (H) X 140 (D) mm
Weight	Approx. 700g
Supplied Accessory	Power cable (1), RCA cable (1), Remote Controller (1), IR Receiver (1), Cable bracket (2), Screw kits (1), Manual (1)